
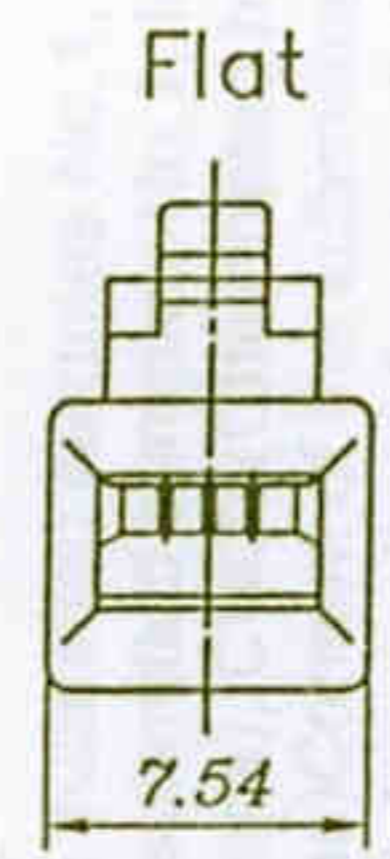
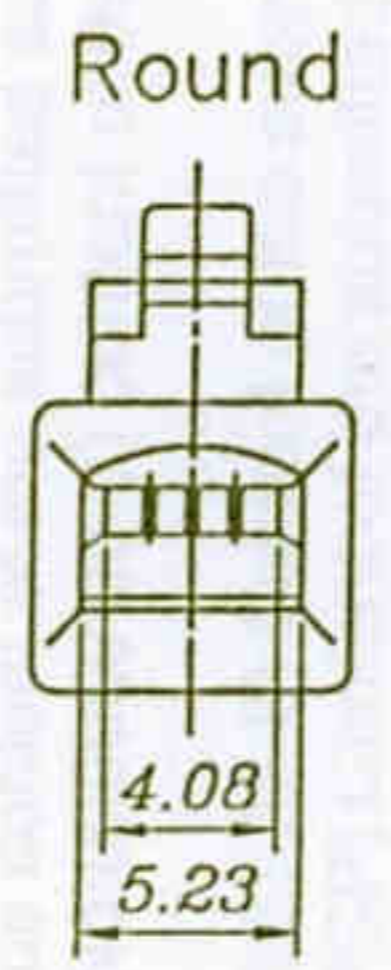
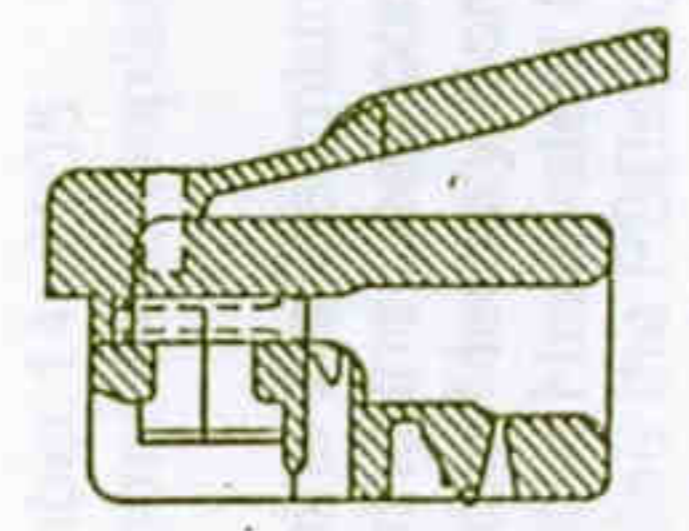
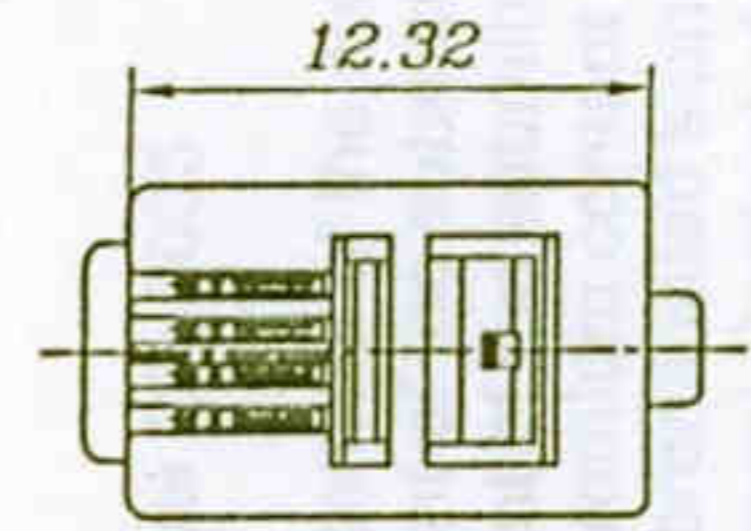
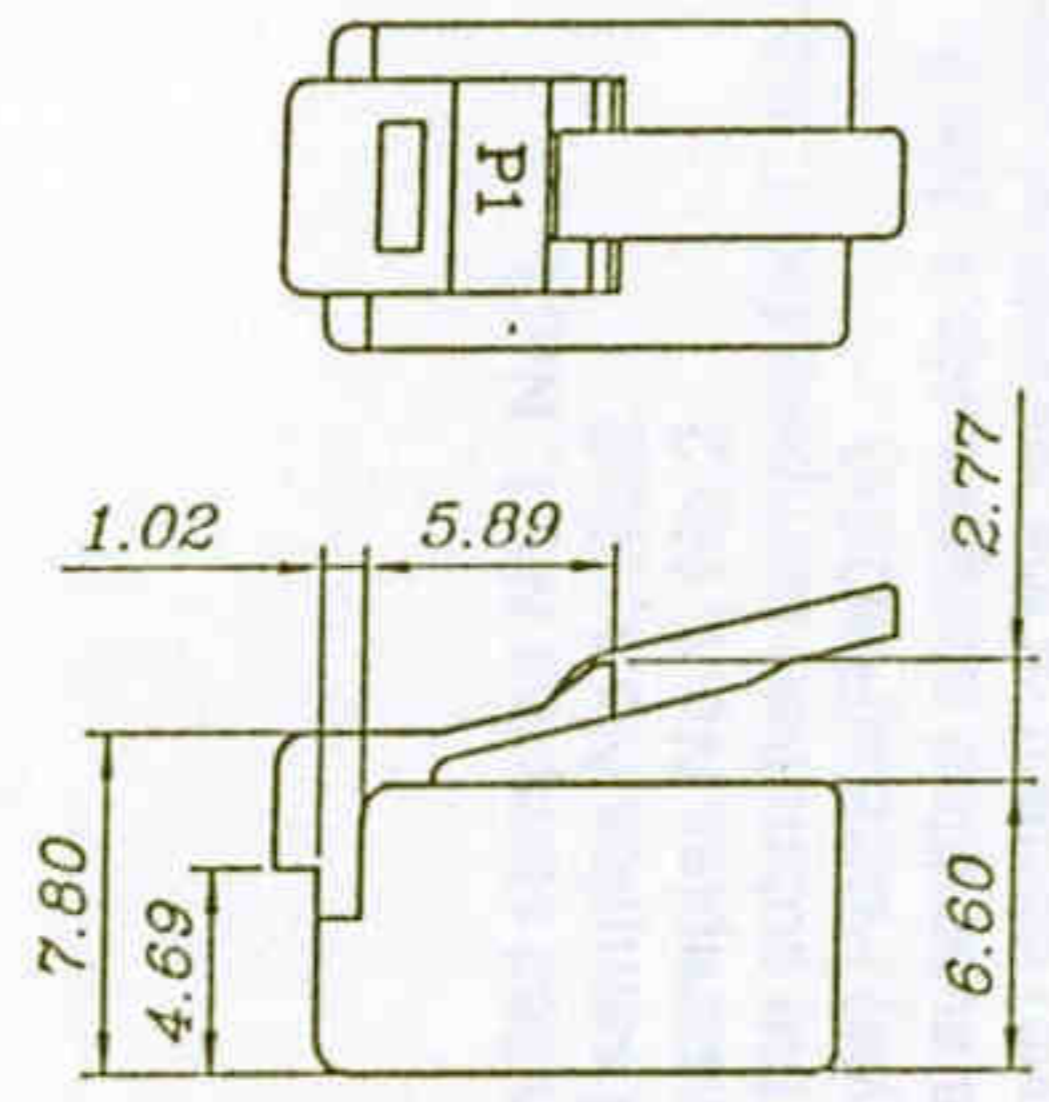


更改 REV	出图日期 DATE	设计内容 MODIFICATION	修改 DRAWN
	19/01/05		

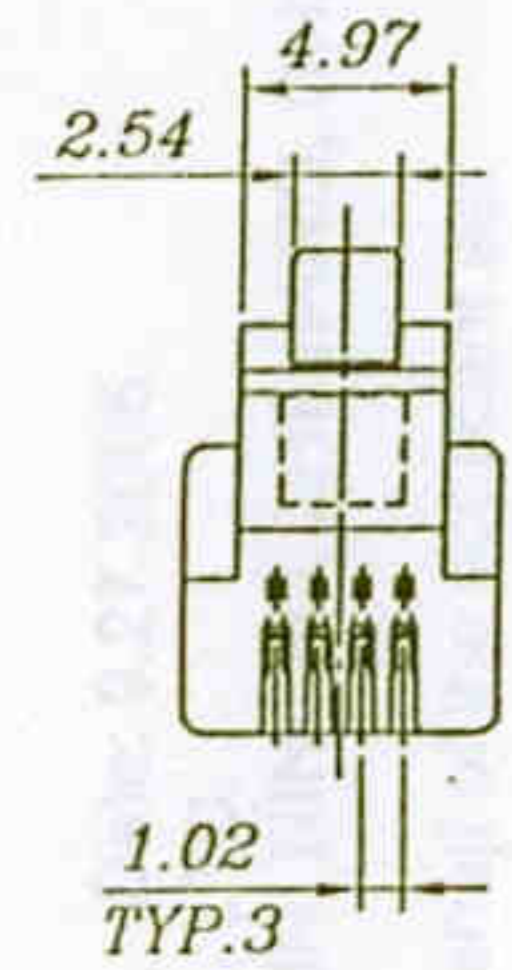

SPECIFICATIONS

1. ELECTRICAL:
 UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.
 INSULATION RESISTANCE: 100 M Ω.
 TERMINATION: RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.

2. MECHANICAL:
 CABLE-TO-PLUG TENSILE STRENGTH: 19.6N/PCS MIN.
 DURABILITY: 200 MATING CYCLES.

3. MATERIAL & FINISH:
 HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
 COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
 CONTACT BLADE: PHOSPHOR BRONZE.
 CONDUCTOR: STRANDED & SOLID WIRE, 24AWG, 26 AWG.
 GOLD PLATING: 3u"~50u", ARE AVAILABLE.

规范

1. 电器:
 UL应用最大250VOLTS AC.
 介质耐电压伏特数:500VOLTS AC.
 绝缘阻抗:100百万欧姆.
 终端阻抗:在环境测试后最大可承受20微欧姆终端阻抗.

2. 机构
 拉力测试:至少19.6N/PCS.
 耐力测试:至少200次之插拔测试.

3. 材质表面处理
 塑胶壳:聚碳酸脂,UL-94V-0 or UL94V-2.
 颜色:透明,或者其他颜色亦可.
 金片:磷铜片.
 导体:多股线&单股线,24AWG,26AWG.
 镀金厚度:3u"~50u",皆可提供.



客户

2005年 1月 19日

2005年 1月 19日

BLADE:

Type	E-03	Y-03	Z-03	E-03	Y-03	AC-03
Drawing						
Mark				✓		

客户用产品图

DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		材质 MATERIAL PC	图号 DWG NO. PLUG-002
.X±0.20	.X°±5°	名称 TITLE 4P4CPLUG	
.XX±0.10	.XX°±2°	制图 DRAWN Lucia	比例 SCALE 2/1
审核 APPROVAL	校对 CHECKED	张数 SHEET 1/1	更改 REV E

ST-DR-009A