

REV	DATE	MODIFICATION	DRAWN
	19/01/05		

SPECIFICATIONS

1. ELECTRICAL:
 UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC
 INSULATION RESISTANCE: 100 M Ω
 TERMINATION: RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.

2. MECHANICAL:
 CABLE-TO-PLUG TENSILE STRENGTH: 19.6N/PCS MIN.
 DURABILITY: 200 MATING CYCLES

3. MATERIAL & FINISH:
 HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
 COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
 CONTACT BLADE: PHOSPHOR BRONZE.
 CONDUCTOR: STRANDED & SOLID WIRE, 24AWG, 26 AWG.
 GOLD PLATING: 3u"-50u", ARE AVAILABLE.

规范

1. 电器:
 UL应用最大250VOLTS AC.
 介质耐电压伏特数: 500VOLTS AC.
 绝缘阻抗: 100百万欧姆.
 终端阻抗: 在环境测试后最大可承受20微欧姆终端阻抗.

2. 机构
 拉力测试: 至少19.6N/PCS.
 耐力测试: 至少200次之插拔测试.



3. 材质表面处理
 塑胶壳: 聚碳酸酯, UL-94V-0 or UL94V-2.
 颜色: 透明, 或者其他颜色亦可.
 金片: 磷铜片.
 导体: 多股线 & 单股线, 24AWG, 26AWG.
 镀金厚度: 3u"-50u", 皆可提供.



客户用产品图

宁波卓新通讯接插件有限公司			
DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		材 质 MATERIAL PC	图 号 DWG NO. PLUG-008
.X±0.20	.X°±5°	名 称 TITLE 8P8CPLUG	
.XX±0.10	.XX°±2°	制 图 DRAWN Lucia	比 例 SCALE 2/1
中 核 APPROVAL [Signature]	核 对 CHECKED [Signature]	张 数 SHEET 1/1	更 改 REV E

2005年 1月 19日

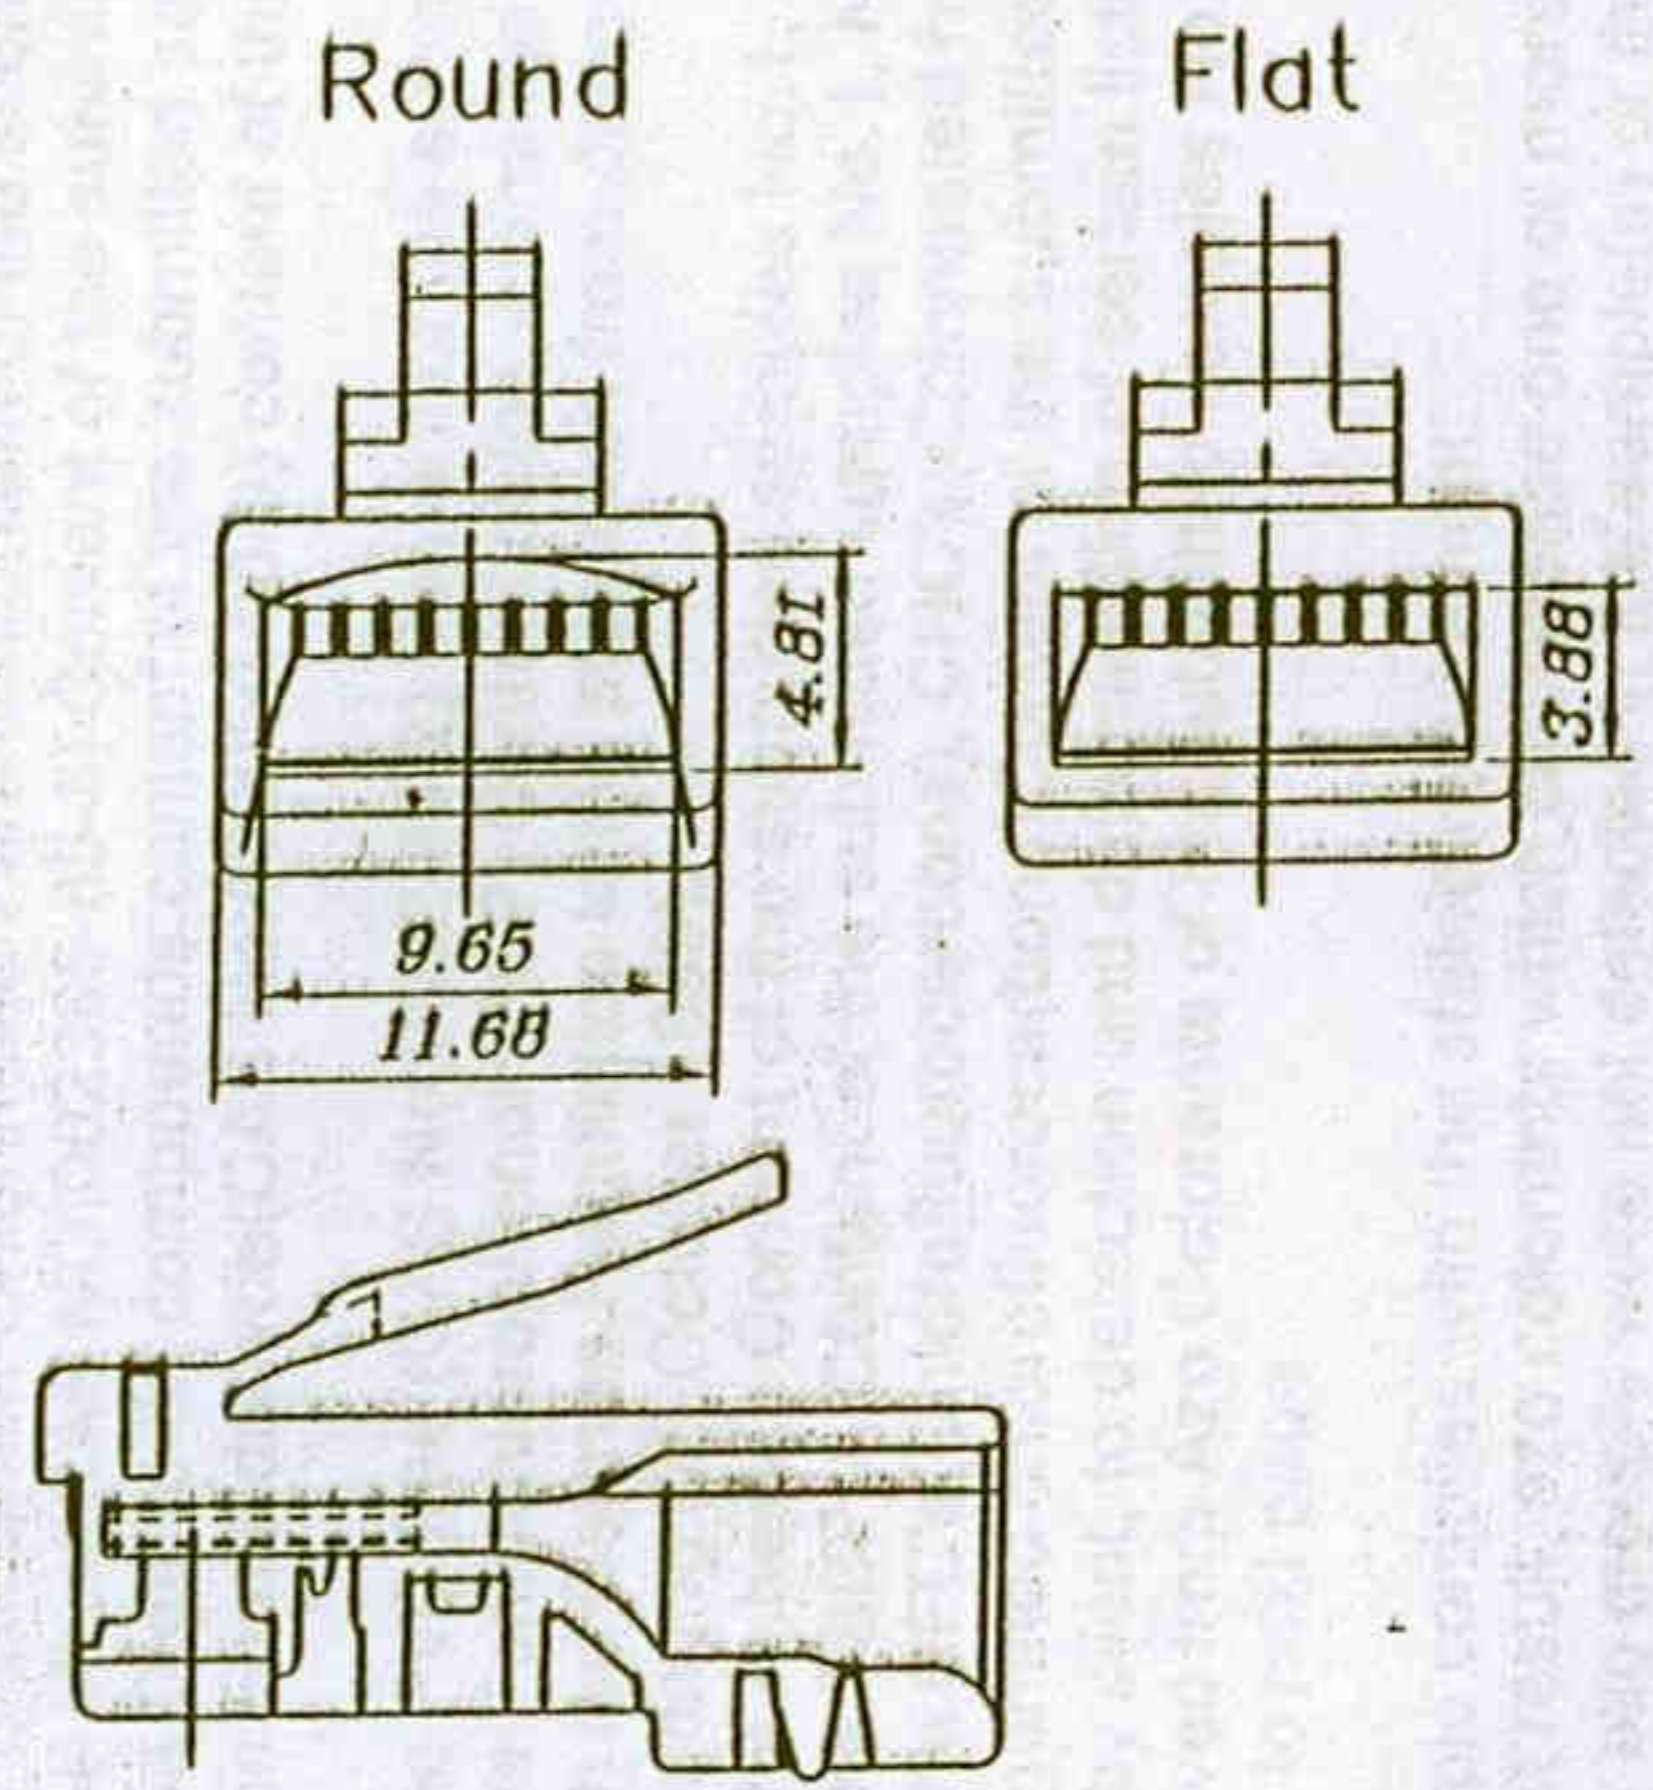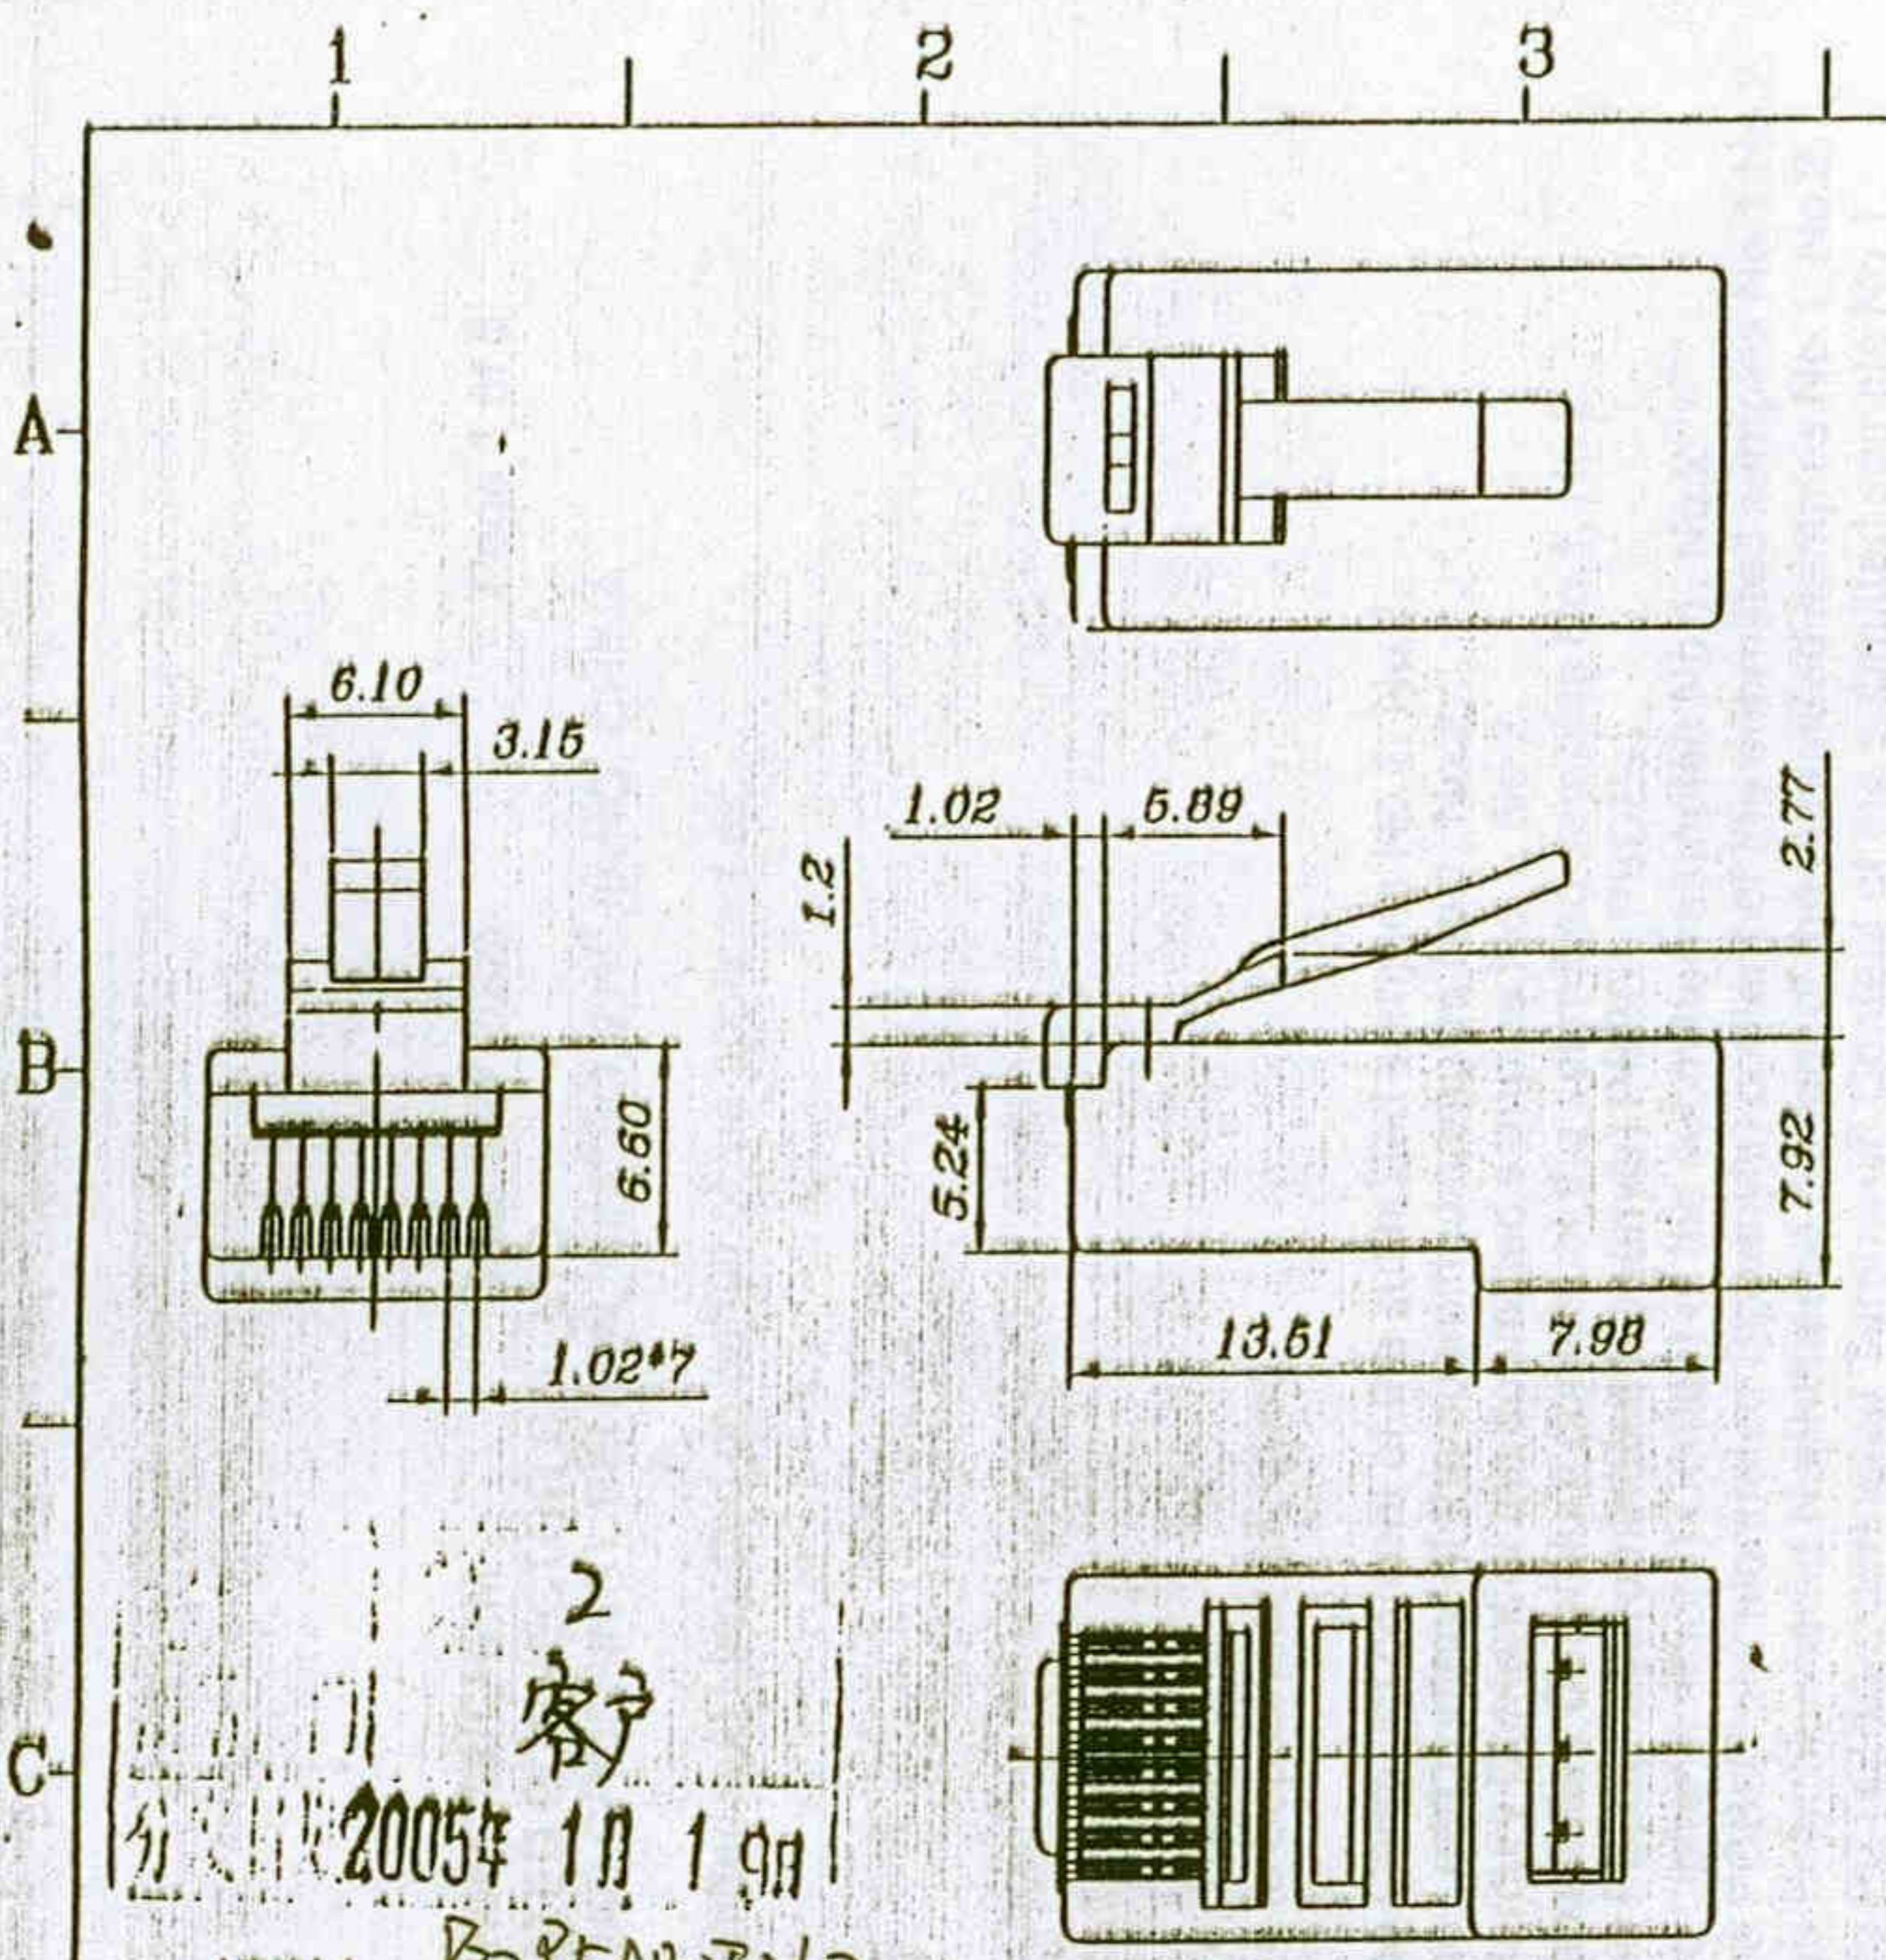

2 客户

2005年 1月 19日

ITEM: P88P5ABW7V8

BLADE:	E	Y	Z	A	YL	ZL		
Drawing								
Mark		✓						
GOLD PLATING	3u"	6u"	15u"	30u"	50u"	CABLE TYPE	ROUND	FLAT
Mark				✓		Mark	✓	