


TA8758SX Cat.5e STD Toolless Keystone Jack

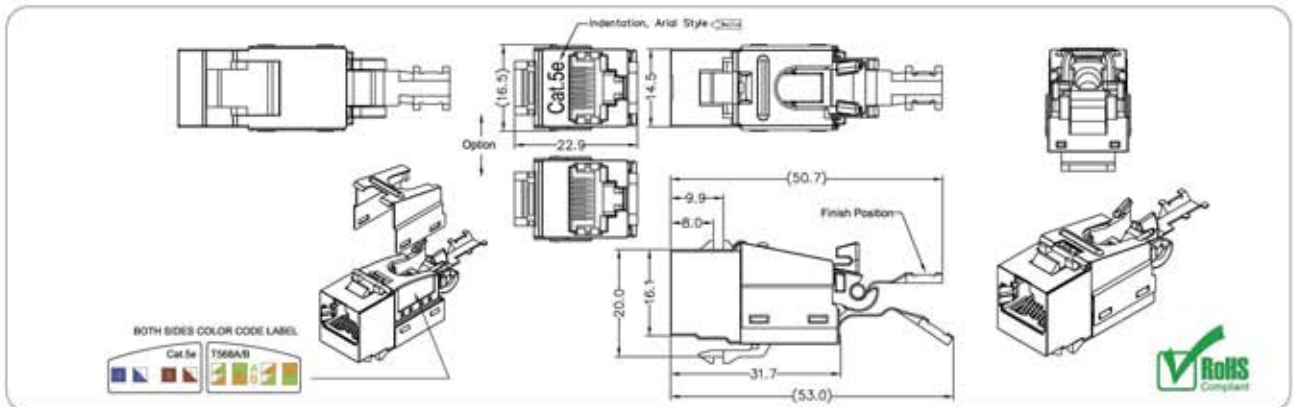

Specification:

TIA/EIA 568-B.2 Cat.5e
 ISO/IEC 11801 2nd Class D Connecting Hardware
 EN 50173-1 Cat.5
 IEC 60603-7

Mechanical:

Plug Insertion Life: 750 Cycles Minimum
 Plug & Jack Contact Force: 100 Grams Minimum
 Plug Retention Force: 30 lbs Minimum
 Temperature: -40°F to 150°F (-40°C to 68°C)

Electrical:

Current Rating: 1.5 Amps
 Insulation Resistance: 500 Mohms Minimum
 Contact Resistance: 20 mohms Maximum
 DC Resistance: 0.1 ohms Maximum

Physicals:

Housing: PC, UL 94V-0
 PCB module
 Insertion: PBT UL 94V-0
 Contact: Ø0.46 mm phosphor bronze gold
 over nickel plating
 IDC: 0.4 mm phosphor bronze tin plating
 IDC holder: PC, 94V-0
 PCB: FR4
 Cap: PC, UL 94V-0
 Door: PC, UL 94V-0
 Shield Cap: SPTE 0.30mm thickness
 Shield Base: SPTE 0.30mm thickness



TA8758ST