



## ID kabelu: TEST

Datum / Čas: 09/16/2009 07:02:48am  
**Světlá výška: 7.5 dB (NEXT 36-45)**  
**Limit testu: EN50173 PL Class D**  
 Typ kabelu: Cat 5e UTP

Operátor: TECHNIK  
 Verze softwaru: 2.2200  
 Verze limit: 1.3700  
 NVP: 69.0%

## Shrnutí testu: PROŠEL

Model: DTX-ELT  
 S/N hlavní jednotky: 1022035  
 S/N vzdálené jednotky: 1022036  
 Hlavní adaptér: DTX-PLA002  
 Vedlejší adaptér: DTX-PLA002

Wire Map (T568B)

**PROŠEL**


1	.....	1
2	————	2
3	.....	3
6	————	6
4	————	4
5	.....	5
7	.....	7
8	————	8
S		S



295 ft





Délka (ft)	[Pár 36]	295
Zpoždění propagace (ns), Limit 498		445
Zpoždění Skew (ns), Limit 44		10
Odpor (ohmy), Limit 21.0		16.8
Ztráta na vstupu Odchylka (dB)	[Pár 78]	1.8
Frekvence (MHz)	[Pár 78]	100.0
Limit (dB)	[Pár 78]	20.4


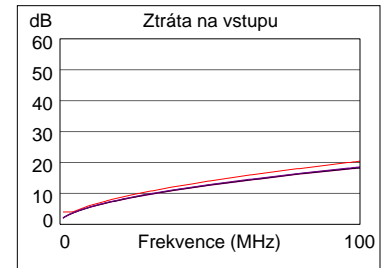


Nejhorší i Okraj      Nejhorší i Barevný tón



<b>PROŠEL</b>	Hlavní	SR	Hlavní	SR
Nejhorší i pár	36-45	12-45	36-45	36-45
<b>NEXT (dB)</b>	7.5	9.0	7.6	10.2
Frekv. (MHz)	67.0	43.0	100.0	99.3
Limit (dB)	35.2	38.3	32.3	32.4
Nejhorší i pár	36	12	36	45
<b>PS NEXT (dB)</b>	8.2	10.7	8.3	12.1
Frekv. (MHz)	82.0	43.3	100.0	99.3
Limit (dB)	30.7	35.3	29.3	29.4

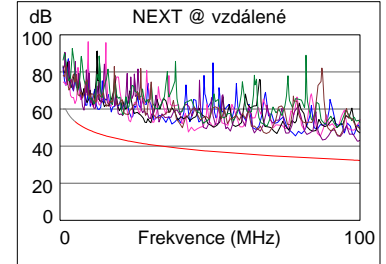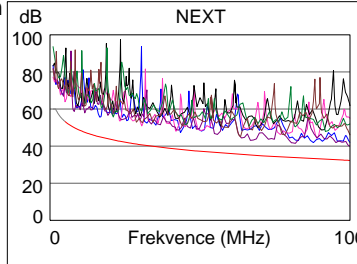



<b>PROŠEL</b>	Hlavní	SR	Hlavní	SR
Nejhorší i pár	12-45	45-12	45-12	12-45
<b>ACR-F (dB)</b>	6.8	6.8	8.7	8.9
Frekv. (MHz)	1.8	1.0	98.3	98.3
Limit (dB)	53.8	58.6	18.8	18.8
Nejhorší i pár	12	12	45	45
<b>PS ACR-F (dB)</b>	8.2	8.3	10.1	10.6
Frekv. (MHz)	1.6	1.8	91.8	93.0
Limit (dB)	51.4	50.8	16.4	16.2

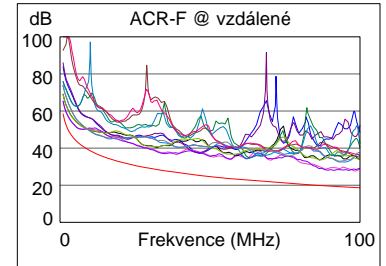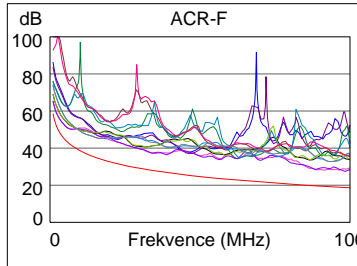

<b>PROŠEL</b>	Hlavní	SR	Hlavní	SR
Nejhorší i pár	36-45	36-45	36-45	36-45
<b>ACR-N (dB)</b>	8.9	9.5	9.8	12.4
Frekv. (MHz)	7.9	7.9	100.0	99.3
Limit (dB)	44.8	44.8	11.9	12.0
Nejhorší i pár	36	45	36	45
<b>PS ACR-N (dB)</b>	10.1	11.4	10.5	14.3
Frekv. (MHz)	81.8	7.8	100.0	99.3
Limit (dB)	12.5	41.9	8.9	9.0

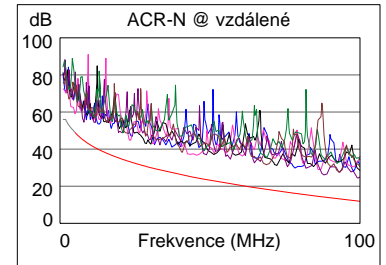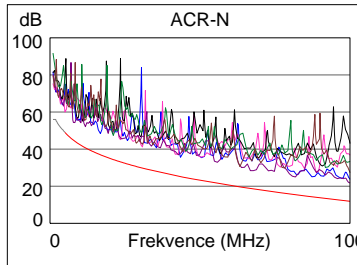

<b>PROŠEL</b>	Hlavní	SR	Hlavní	SR
Nejhorší i pár	78	45	36	36
<b>RL (dB)</b>	7.2	6.7	10.9	12.5
Frekv. (MHz)	2.6	2.8	98.5	83.8
Limit (dB)	19.0	19.0	12.1	12.8

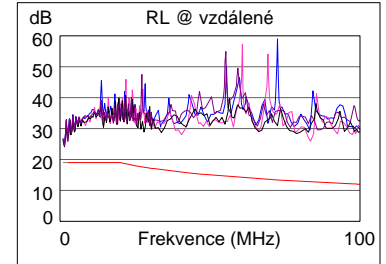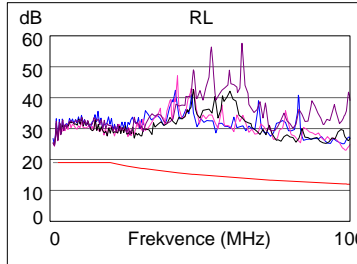

Vyhovující síťové standardy:  
 10BASE-T      100BASE-TX      100BASE-T4  
 1000BASE-T      ATM-25      ATM-51  
 ATM-155      100VG-AnyLan      TR-4  
 TR-16 Active      TR-16 Passive